




PRECISION BEARING ACCESSORIES SPAIN C...

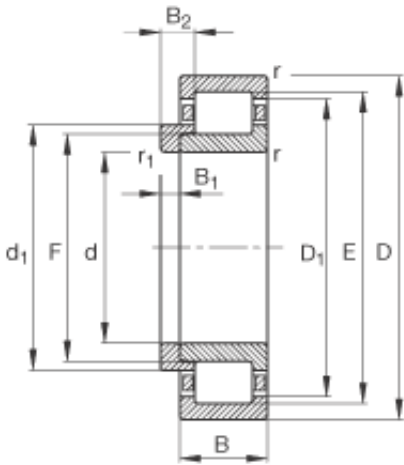

110 mm x 240 mm x 80 mm FAG NJ2322-E-TVP2 + HJ2322-E cylindrical roller bearings

Bearing No. NJ2322-E-TVP2 + HJ2322-E

NJ2322-E-TVP2 + HJ2322-E Bearing 2D drawings and 3D CAD models

| | |
|--|--|
| Size | 110x240x80 mm |
| Bore Diameter | 110 mm |
| Outer Diameter | 240 mm |
| Width | 80 mm |
| d | 110 mm |
| D | 240 mm |
| B | 80 mm |
| B ₁ | 14 mm |
| B ₂ | 26,5 mm |
| D ₁ | 200,9 mm |
| D _{a max} | 226 mm |
| d ₁ | 155,6 mm |
| d _{a max} | 140 mm |
| d _{a min} | 124 mm |
| d _{c min} | 158 mm |
| E | 211 mm |
| F | 143 mm |
| r _{1 min} | 3 mm |
| r _{a max} | 2,5 mm |
| r _{min} | 3 mm |
| s | 5,8 mm / Axial displacement facility from central position |
| - HJ2322-E / Designation, L-section ring | HJ2322E / Designation, Lsection ring |



PRECISION BEARING ACCESSORIES SPAIN C...

| | |
|-----------------|---|
| m | 16,9 kg / Weight |
| m ₁ | 1,3 kg |
| C _r | 750000 N / Dynamic load rating (radial) |
| C _{0r} | 800000 N / Static load rating (radial) |
| n _G | 3350 1/min / Limiting speed |
| n _B | 2320 1/min / Reference speed |
| C _{ur} | 136000 N / Fatigue limit load, radial |